

Invoice

Elektronik Lab

No.10D, Masilamani Street, T.NagarChennai-600 017, India
Phone: (044) 2433 69532431 0156 Fax: (044) 2432 2819
Email: info@elektroniklab.com Web: www.elektroniklab.com
TIN No.: 33751582525 CST No.: 870519/1-4-2008
ST No.: AAEPN5577BST002



PARMESHWAR
Marketing Executive

ELEKTRONIK LAB
Communication and Navigation - Equipment

B2/1B, Nidhi House, Flat No. 101,
First Floor, Safdarjung Enclave,
Africa Avenue, New Delhi - 110029.
www.elektroniklab.com
www.gpsonlineshop.com
www.techstoreindia.com

Tel : +91 011 41076010
Fax : +91 011 41076010
Mob : +91 99996 85735 ✓
+91 88261 24865
e-mail : vijay@elektroniklab.com

Services at

Mumbai - Chennai - Vizag - Cochin - Andaman - Tuticorin - Kakinada



GARMIN

motevo
Navigation and Beyond

Model Name: eTrex® 10

Price: Rs. 9100 on February 21, 2013 at
<http://gpsonlineshop.com>

Adventure Rediscovered

Paperless Geocaching


Spend more time in the field and less time fumbling with paper!
The eTrex stores and displays key information, including location, terrain, difficulty, hints and descriptions, which means no more manually entering coordinates and paper print outs. Simply upload the geocaching GPX file to your unit and start hunting for caches.

Track More Satellites

Find your way with the first consumer-grade GPS receiver that tracks both GPS and Russian Federation GLONASS satellites simultaneously. When using them together, the receiver has the ability to lock onto 24 more satellites than using GPS alone, ensuring you can ?lock on? to a position more quickly.

| Physical & Performance | |
|----------------------------|--|
| Unit dimension: | 2.1 |
| Display size, WxH: | 1.4 |
| Display resolution, WxH: | 128 x 160 pixels |
| Display type: | transflective, monochrome |
| Weight: | 5 oz (141.7 g) with batteries |
| Battery life: | 25 hours |
| Battery: | 2 AA batteries (not included); NiMH or Lithium recommended |
| Waterproof: | yes (IPX7) |
| Floats: | no |
| High-sensitivity receiver: | yes |
| PC interface: | USB |
| RoHS version available: | N/A |
| maps & Memory | |
| Basemap: | yes |
| Ability to add maps: | No |
| Built-in memory: | No |
| Accepts data cards: | No |
| Waypoints/favorites: | 1000 |
| Routes: | 50 |
| Track log: | 10,000 points, 100 saved track |
| Features: | |
| Automatic routing: | No |
| Electronic compass: | No |
| Barometric altimeter: | No |
| Geocaching mode: | No |
| Outdoor GPS games: | No |
| Hunt/fish calendar | Yes |
| Tide tables: | Yes |

GPS Coordinates System

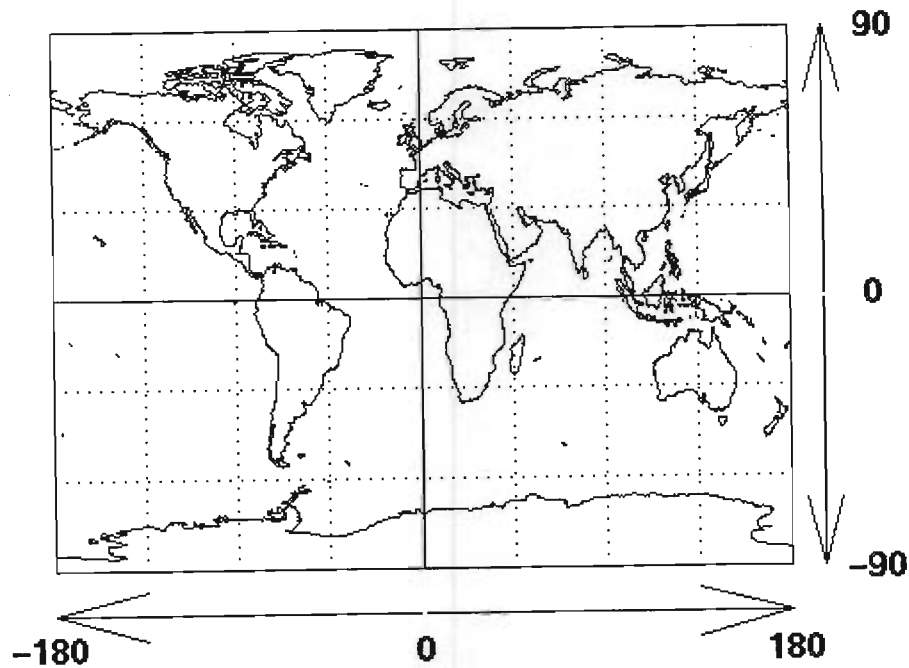

Remember that in the case of degrees of latitude, the format would be negative or positive DD, while longitude could be negative or positive DDD. There is usually a quadrasphere designation as well, such as N, S, E or W, based on the equator and the prime meridian.

Degrees, minutes and seconds (DDD, MM, SS) is the conventional method of presentation.

Decimal Degrees is displayed as the degrees in normal value, with both minutes and seconds in decimal format, as a degree value. There is ONLY a degree designation. (DDD.DDDD). A maximum of 4 decimal places is adequate.

What is most often known as GPS format (though not all GPS units use it or agree on it...), is displayed as (DDD,MM.MMMM) in which seconds are converted to decimal minutes, as a minute value.

Degrees Minutes Seconds to Degrees Minutes.m (GPS)
Degrees = Degrees, Minutes.m = Minutes + (Seconds / 60)

Degrees Minutes.m to Decimal Degrees
.d = M.m / 60, Decimal Degrees = Degrees + .d

There are 60 minutes in a degree and 60 seconds in a minute; So, 3600 seconds in a degree.



Explore
Discover Features

Shop
Buy Devices

Maps & Accessories
Find Content, Services & More

Support
Get Help

Home » About GPS » What is GPS?



Quick Links

[What is GPS?](#)

[Applications](#)

[Glossary](#)


[GPS Guides](#)

[What is WAAS?](#)

[Geocaching](#)


What is GPS?

The Global Positioning System (GPS) is a satellite-based navigation system made up of a network of 24 satellites placed into orbit by the U.S. Department of Defense. GPS was originally intended for military applications, but in the 1980s, the government made the system available for civilian use. GPS works in any weather conditions, anywhere in the world, 24 hours a day. There are no subscription fees or setup charges to use GPS.

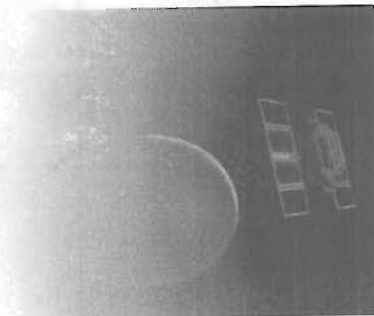

How it works


GPS satellites circle the earth twice a day in a very precise orbit and transmit signal information to earth. GPS receivers take this information and use triangulation to calculate the user's exact location. Essentially, the GPS receiver compares the time a signal was transmitted by a satellite with the time it was received. The time difference tells the GPS receiver how far away the satellite is. Now, with distance measurements from a few more satellites, the receiver can determine the user's position and display it on the unit's electronic map.

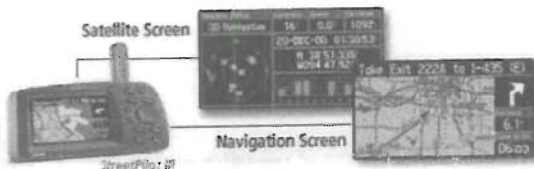

A GPS receiver must be locked on to the signal of at least three satellites to calculate a 2D position (latitude and longitude) and track movement. With four or more satellites in view, the receiver can determine the user's 3D position (latitude, longitude and altitude). Once the user's position has been determined, the GPS unit can calculate other information, such as speed, bearing, track, trip distance, distance to destination, sunrise and sunset time and more.

How accurate is GPS?

Today's GPS receivers are extremely accurate, thanks to their parallel multi-channel design. Garmin's 12 parallel channel receivers are quick to lock onto satellites when first turned on and they maintain strong locks, even in dense foliage or urban settings with tall buildings. Certain atmospheric factors and other sources of error can affect the accuracy of GPS receivers. Garmin® GPS receivers are accurate to within 15 meters on average.

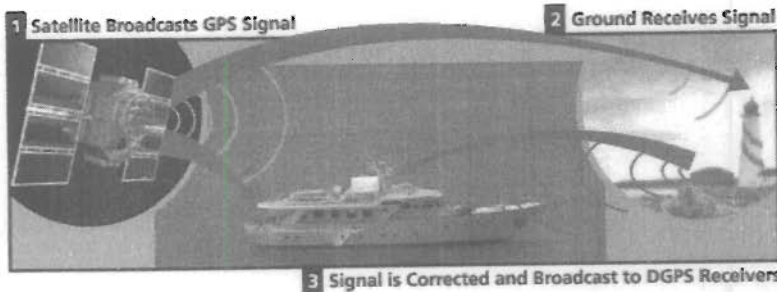

Newer Garmin GPS receivers with WAAS (Wide Area Augmentation System) capability can improve accuracy to less than three meters on average. No additional equipment or fees are required to take advantage of WAAS. Users can also get better accuracy with Differential GPS (DGPS), which corrects GPS signals to within an average of three to five meters. The U.S. Coast Guard operates the most common DGPS correction service. This system consists of a network of towers that receive GPS signals and transmit a corrected signal by beacon transmitters. In order to get the corrected signal, users must have a differential beacon receiver and beacon antenna in addition to their GPS.

The GPS satellite system

The 24 satellites that make up the GPS space segment are orbiting the earth about 12,000 miles above us. They are constantly moving, making two complete orbits in less than 24 hours. These satellites are travelling at speeds of roughly 7,000 miles an hour.

GPS satellites are powered by solar energy. They have backup batteries onboard to keep them running in the event of a solar eclipse, when there's no solar power. Small rocket boosters on each satellite keep them flying in the correct path.

Here are some other interesting facts about the GPS satellites (also called NAVSTAR, the official U.S. Department of Defense name for GPS):

- The first GPS satellite was launched in 1978.
- A full constellation of 24 satellites was achieved in 1994.
- Each satellite is built to last about 10 years. Replacements are constantly being built and launched into orbit.
- A GPS satellite weighs approximately 2,000 pounds and is about 17 feet across with the solar panels extended.
- Transmitter power is only 50 watts or less.

What's the signal?

GPS satellites transmit two low power radio signals, designated L1 and L2. Civilian GPS uses the L1 frequency of 1575.42 MHz in the UHF band. The signals travel by line of sight, meaning they will pass through clouds, glass and plastic but will not go through most solid objects such as buildings and mountains.

A GPS signal contains three different bits of information - a pseudorandom code, ephemeris data and almanac data. The pseudorandom code is simply an I.D. code that identifies which satellite is transmitting information. You can view this number on your Garmin GPS unit's satellite page, as it identifies which satellites it's receiving.

Ephemeris data, which is constantly transmitted by each satellite, contains important information about the status of the satellite (healthy or unhealthy), current date and time. This part of the signal is essential for determining a position.

The almanac data tells the GPS receiver where each GPS satellite should be at any time throughout the day. Each satellite transmits almanac data showing the orbital information for that satellite and for every other satellite in the system.



Sources of GPS signal errors

Factors that can degrade the GPS signal and thus affect accuracy include the following:

- Ionosphere and troposphere delays - The satellite signal slows as it passes through the atmosphere. The GPS system uses a built-in model that calculates an average amount of delay to partially correct for this type of error.
- Signal multipath - This occurs when the GPS signal is reflected off objects such as tall buildings or large rock surfaces before it reaches the receiver. This increases the travel time of the signal, thereby causing errors.
- Receiver clock errors - A receiver's built-in clock is not as accurate as the atomic clocks onboard the GPS satellites. Therefore, it may have very slight timing errors.
- Orbital errors - Also known as ephemeris errors, these are inaccuracies of the satellite's reported location.
- Number of satellites visible - The more satellites a GPS receiver can "see," the better the accuracy. Buildings, terrain, electronic interference, or sometimes even dense foliage can block signal reception, causing position errors or possibly no position reading at all. GPS units typically will not work indoors, underwater or underground.

- Satellite geometry/shading - This refers to the relative position of the satellites at any given time. Ideal satellite geometry exists when the satellites are located at wide angles relative to each other. Poor geometry results when the satellites are located in a line or in a tight grouping.
- Intentional degradation of the satellite signal - Selective Availability (SA) is an intentional degradation of the signal once imposed by the U.S. Department of Defense. SA was intended to prevent military adversaries from using the highly accurate GPS signals. The government turned off SA in May 2000, which significantly improved the accuracy of civilian GPS receivers.

Customer Service

- Special Offers
- Shipping & Delivery
- Returns & Refunds
- Find a Store or Dealer
- Contact Us

Company

- About Us
- Blog
- Investors
- Newsroom
- Retail Store

Careers

- Jobs
- Benefits
- Life at Garmin

Garmin Sites

- myGarmin™
- Garmin Connect™
- OpenCaching
- flyGarmin ©

Partners

- Commercial Solutions
- Developers
- Dealer Resource Center

